




**PINCE / CLAMP TYPE #2**  
 PTS CAT. #: **C6002205** ou **C6002316**



PINCE VERSATILE /  
VERSATILE CLAMP

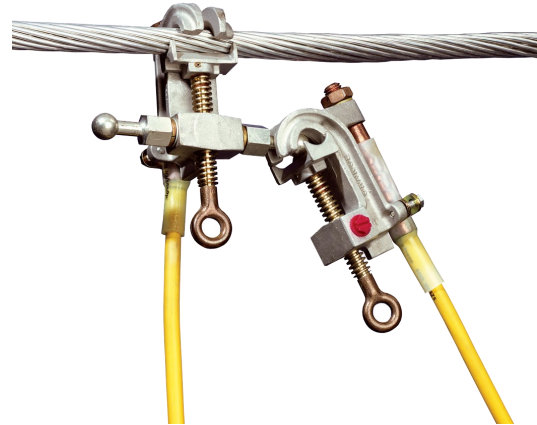

Présenter avec point fixe de chaque côté /  
 Shown with ball stud on each side

**CAPACITÉ ÉLECTRIQUE / ELECTRICAL RATING**

Capacité / Current Rating	[kA]	35
Courant Continu / Continuous Rating	[Amps]	400
Court-Circuit / Fault Current	<b>15 Cycles</b>	43 000
Court-Circuit / Fault Current	<b>30 Cycles</b>	30 000

**CAPACITÉ MÉCANIQUE / MECHANICAL RATING**

Couple de Serrage / Recommended Torque	[Pouce/Lbs]/[Inch/Lbs]	250
Couple de Serrage Point Fixe / Recommended Torque Ball Stud	[Pouce/Lbs]/[Inch/Lbs]	300
Conducteur maximal / Maximum Conductor	[Pouce]/[Inch]	636 ACSR
Conducteur Minimum / Minimum Conductor	[Pouce]/[Inch]	# 8 sol. (0.128")
Câble de MALT Maximal / Maximum Jumper Range		4/0 avec manchon fileté 5/8"-11 UN/ with 5/8"-11 UNC threaded lug
Câble de MALT minimum / Minimum Jumper Range		# 2 avec manchon fileté 5/8"-11 UN/ with 5/8"-11 UNC threaded lug
Acceptation Point Fixe / Ball Stud Acceptance		20 mm / 0.788"
Poids / Weight		1.5 Lbs / 0.68Kg
Designation ASTM / Designation ASTM	<b>F 855</b>	Type 1 – Classe A – Grade 5

MALT / GROUNDING