




Matériel: Polymère gris
Material: Grey polymer

-Goujon 3/8-16, avec noix et pince pour fils.
-3/8-16 stud with nut & wire clamp

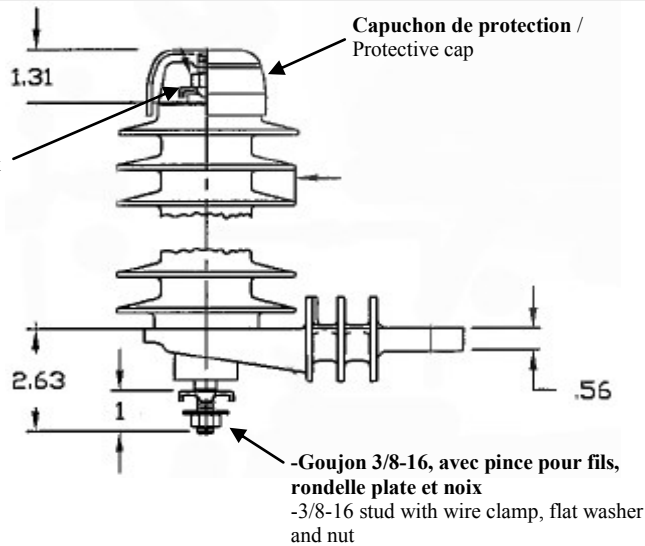

Séries: PDV-100 Optima

Numéro de catalogue. Catalog number.	Rated Voltage kV	MCOV kV	Height X (in.)	Leakage Distance Terminal to Base (in.)	0.5 μsec 10kA Max. IR-kV	500A Switching Surge Maximum IR-kV	8/20 Maximum Discharge Voltage - kV						Poids lbs/100 Weight lbs/100
							1.5 (kA)	3 kA	5 (kA)	10 (kA)	20 (kA)	40 (kA)	
2137037314	3	2.55	6.8	8.5	10.6	7.6	8.0	8.5	9.0	9.9	11.1	13.2	290
2137057314	6	5.1	7.6	11.3	21.3	15.3	15.9	17.0	18.0	19.8	22.3	26.5	330
2137087314	9	7.65	8.7	14.4	31.2	22.4	23.3	24.9	26.4	29.0	32.6	38.8	380
2137097314	10	8.4	8.7	14.4	34.0	24.4	25.4	27.1	28.8	31.6	35.6	42.3	380
2137107314	12	10.2	9.3	17.0	40.4	29.0	30.3	32.3	34.2	37.6	42.3	50.3	430
2137137314	15	12.7	11.6	25.2	51.4	36.9	38.5	41.1	43.5	47.8	53.8	64.0	560
2137157314	18	15.3	11.6	25.2	60.6	43.5	45.4	48.4	51.3	56.4	63.5	75.5	560
2137177314	21	17	12.4	28.1	68.3	49.0	51.1	54.5	57.8	63.5	74.4	85.0	520
2137207314	24	19.5	15.3	36.5	81.9	58.8	61.3	65.5	69.3	76.2	85.7	102.0	830
2137227314	27	22	16.4	39.6	91.9	65.9	68.8	73.4	77.8	85.5	96.2	114.4	870
2137247314	30	24.4	16.9	42.2	101.1	72.5	75.7	80.7	85.5	94.0	105.8	125.8	920
2137297314	36	29	19.3	50.4	121.4	87.0	97.9	97.0	102.7	112.9	127.0	151.1	1030

Protection

**PARAFONDRE DE TYPE DISTRIBUTION EN POLYMÈRE.
DISTRIBUTION TYPE POLYMER SURGE ARRESTER.**