




Droit / Straight



Évasé / Flaired

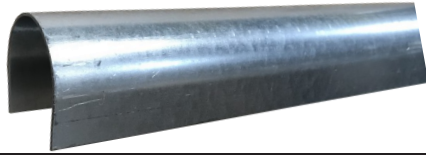

Quincaillerie / Hardware

Numéro de catalogue. Catalog number.	Longueur total (po) Total length (in)	Ouverture (po.) Opening (in.)	Poids (lbs) Weight (lbs)
9876	96	3/4	5.3
9878	96	1-1/4	7.6
9882	96	2-1/4	14.7
9884	96	3-1/4	20
9886	96	3-3/4	21.6
9888	96	4-1/4	28
9889	96	5	33

Numéro de catalogue. Catalog number.	Longueur total (po) Total length (in)	Ouverture (po.) Opening (in.)	Poids (lbs) Weight (lbs)
_____	_____	_____	_____
9878F	96	1-1/4	8.4
9882F	96	2-1/4	16
9884F	96	3-1/4	22
9886F	96	3-3/4	23.75
9888F	96	4-1/4	31
9889F	96	5	36.5

Courroie (3 par long de 96'')
 Strap (3 per 96'' length)



Numéro de catalogue. Catalog number.	Dimension du protège (po.) Guard dimension (in.)	Diamètre des trous (po) Diameter of holes (in)	Poids (lbs) Weight (lbs)
9890	3/4	1/4	0.12
9891	1-1/4	1/4	0.15
9892	2-1/4	1/4	0.24
9893	3-1/4	5/16	0.60
9894	3-3/4	5/16	0.70
9894-1/4	4-1/4	5/16	0.75
9895	5	5/16	0.90

Matériel: Acier Galvanisé a chaud
Material: Hot dip galvanized steel

PROTÈGE CABLE / U-CABLE GUARD