




Quincaillerie / Hardware

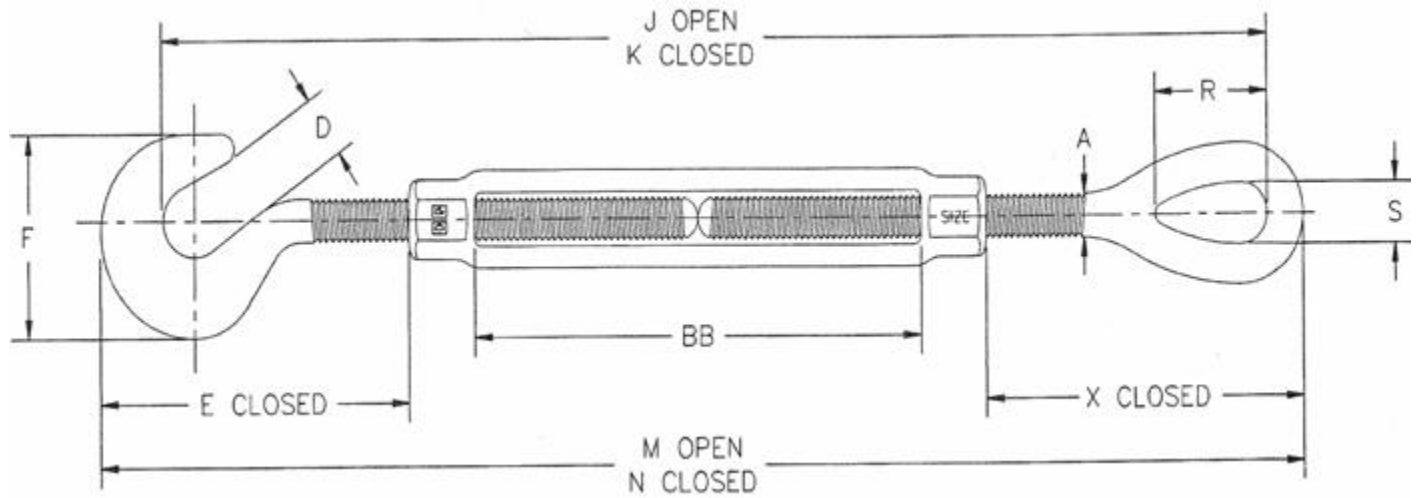

Numéro de catalogue Catalog number	Diamètre et course de serrage (po.) Thread Diameter & Take Up (in.)	*Limite de la charge de travail (lbs) *Working load limit (lbs)	Poids (lbs) Weight (lbs)	Dimensions po. in.											
				A	D	E	F	J	K	M	N	R	S	X	BB
TB306HE	3/8 x 6	*1000	0.78	0.38	0.56	2.30	1.77	16.98	10.98	17.94	11.94	1.12	0.53	2.52	6.00
TB406HE	1/2 x 6	*1500	1.61	0.50	0.66	2.94	2.28	19.45	12.45	20.67	13.67	1.42	0.72	3.23	6.00
TB412HE	1/2 x 12	*1500	2.26	0.50	0.66	2.94	2.28	31.45	18.45	32.67	19.67	1.42	0.72	3.23	12.00
TB506HE	5/8 x 6	*2250	2.70	0.63	0.90	3.69	2.81	21.96	13.96	22.72	15.47	1.80	0.88	3.90	6.00
TB512HE	5/8 x 12	*2250	3.78	0.63	0.90	3.69	2.81	33.21	19.96	34.72	21.47	1.80	0.88	3.90	12.00
TB606HE	3/4 x 6	*3000	3.89	0.75	0.98	4.52	3.33	23.13	15.63	24.95	17.45	2.09	1.00	4.69	6.00
TB612HE	3/4 x 12	*3000	5.83	0.75	0.98	4.52	3.33	35.13	21.63	36.95	23.45	2.09	1.00	4.69	12.00
TB618HE	3/4 x 18	*3000	6.33	0.75	0.98	4.52	3.33	47.13	27.63	48.95	29.45	2.09	1.00	4.69	18.00
TB812HE	1 x 12	*5000	11.93	1.00	1.25	5.84	4.25	38.80	24.80	41.20	27.20	3.00	1.44	6.36	12.00

***La charge sécuritaire est 2.5 fois la charge de travail.**
La charge Ultime est 5 fois la charge de travail.

***Proof load is 2.5 times working load**
Ultimate load is 5 times working load

Matériel: Acier Galvaniser

Material: Galvanized steel

TENDEUR À VIS / TURNBUCKLE