



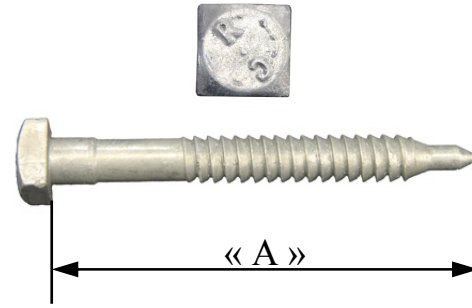

Régulier / Standard

FD= Fetter thread, Drive point. Tête carré / Square Head

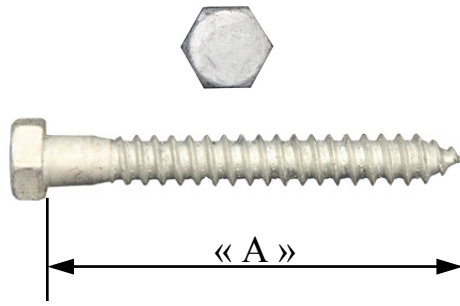

Numéro de catalogue. Catalog number.	Diamètre du boulon (po.) Bolt diameter (in.)	Dimension « A » (po.) Dimension « A » (in.)	Poids (lbs) Weight (lbs)	Resistance nominale à la traction (lbs) Rated tensile strength (lbs)
LB202	1/4	2	0.03	————
LB202.5	1/4	2-1/2	0.035	————
LB203	1/4	3	0.04	————
LB_5/16_X_2	5/16	2	0.05	————
LB_5/16_X_3	5/16	3	0.07	————
LB_5/16_X_4	5/16	4	0.08	————
LB302	3/8	2	0.09	4,250
LB303 & LB303FD	3/8	3	0.11	4,250
LB303.5	3/8	3-1/2	0.12	4,250
LB304 & LB304FD	3/8	4	0.14	4,250
LB305	3/8	5	0.16	4,250
LB403	1/2	3	0.19	7,800
LB404	1/2	4	0.25	7,800
LB404.5 & LB404.5FD	1/2	4-1/2	0.28	7,800
LB504	5/8	4	0.38	12,400
LB505	5/8	5	0.46	12,400
LB506	5/8	6	0.50	12,400

Matériel: Acier Galvanisé
Material: Galvanized steel

Note: Autres dimensions disponible / Other sizes available

TIRE FOND / LAG BOLT