

H

G

F



E

D

C


B

A

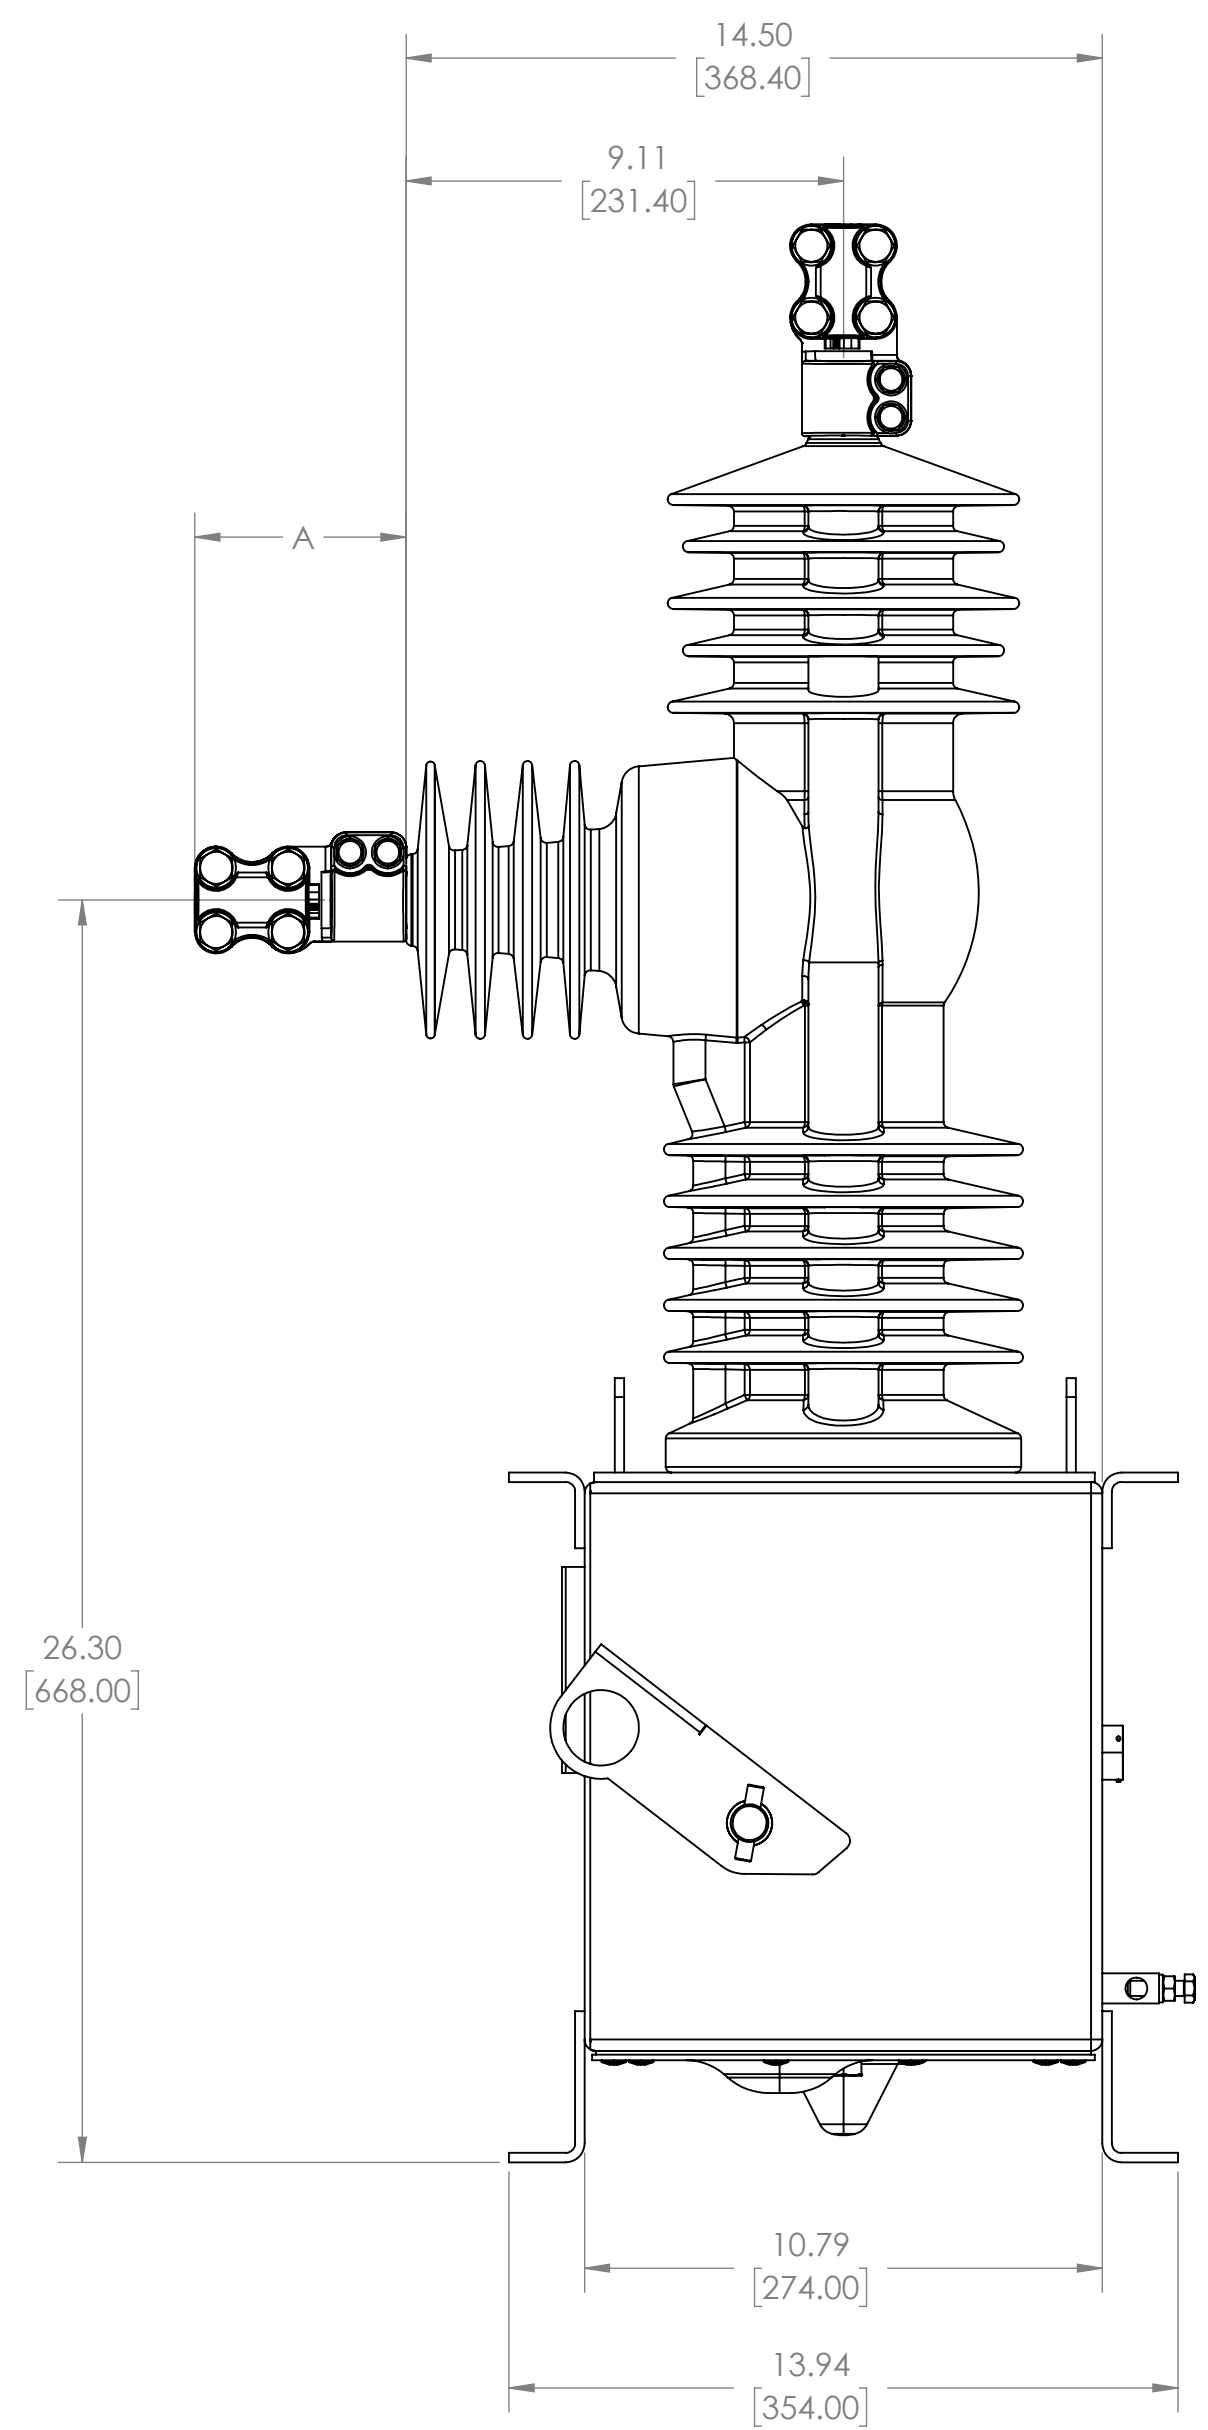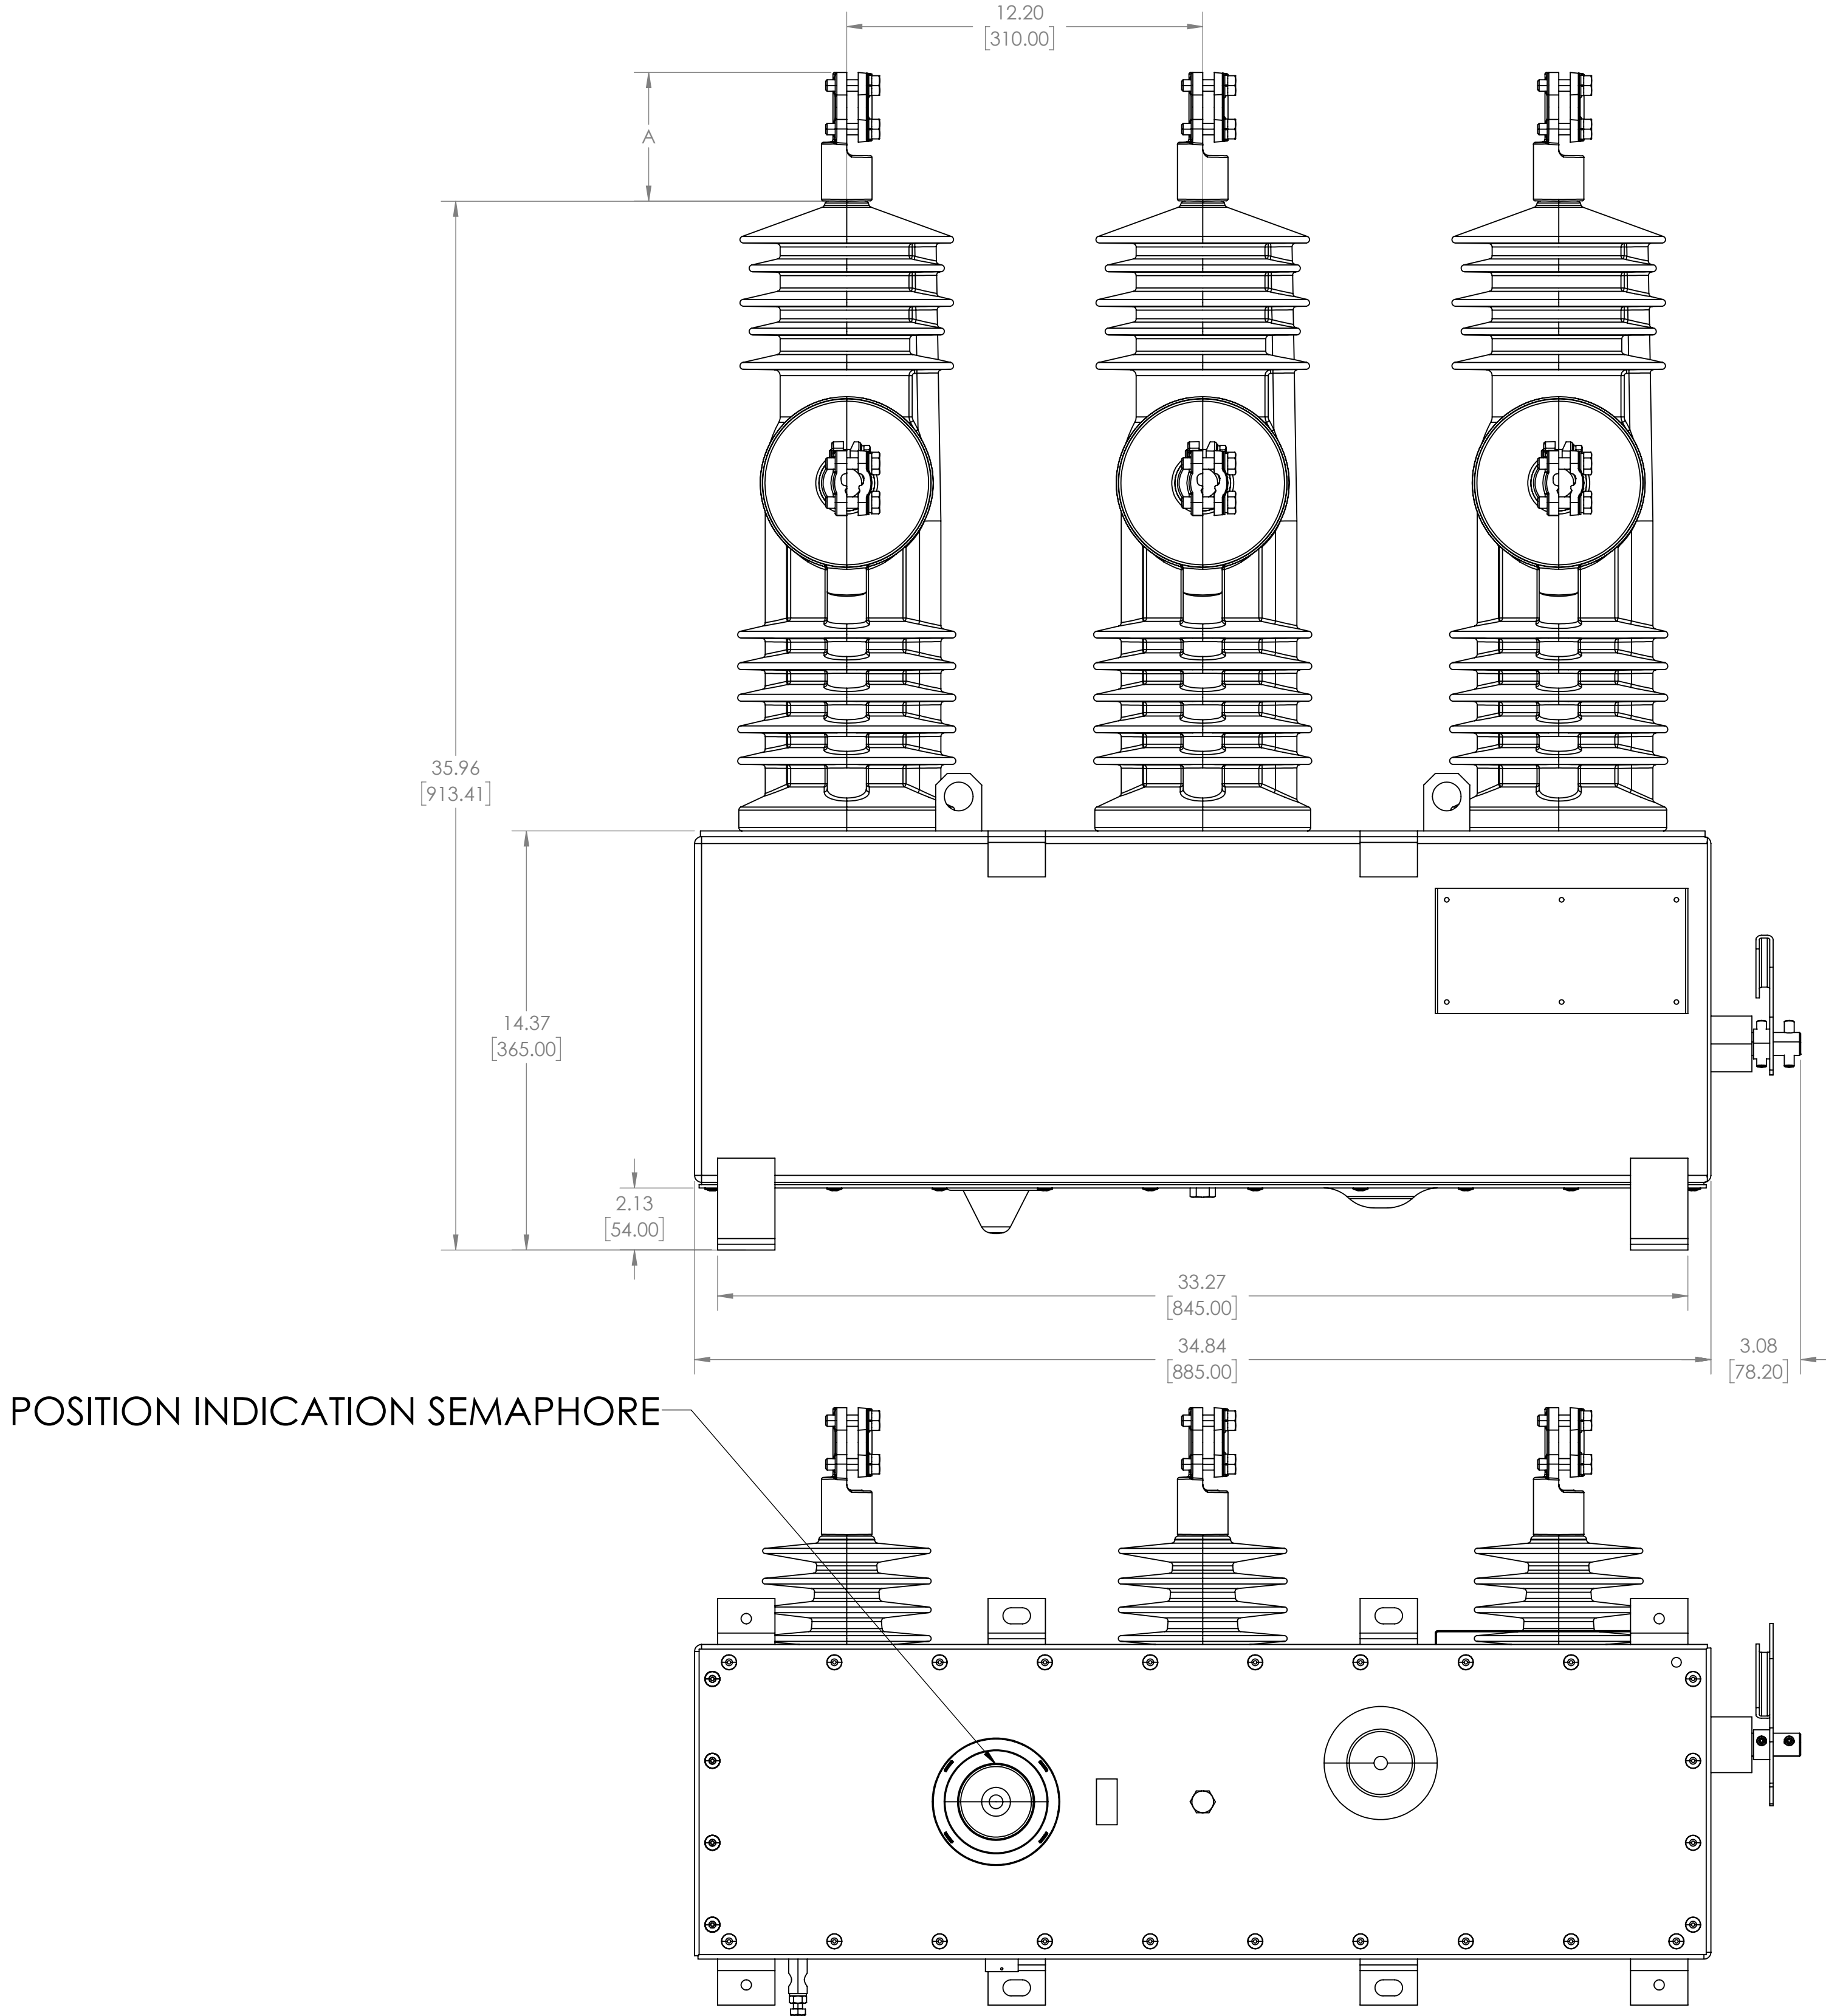

3 PHASE GANGED RECLOSER - 27 kV			
DIMENSION	TERMINAL		
	AERIAL	2 HOLE NEMA	4 HOLE NEMA
A	4.41 in (112 mm)	5.40 in (137 mm)	5.21 in (132 mm)

3 PHASE GANGED RECLOSER - 27 kV	
CREEPAGE DISTANCE, TERMINAL TO TERMINAL	38.08 in (967.2 mm)
CREEPAGE DISTANCE, TERMINAL TO GROUND	30.52 in (775.2 mm)
MINIMUM STRIKE DISTANCE	12.04 in (305.8 mm)



PTS

ÉLECTRIQUE Ltée

20201 ave. Clark Graham, Baie d'Urfé, Qc H9X 3T5
Tél. (514)457-8886 Fax. (514)457-6787
1-800-363-8420 www.ptselectrique.com

TOL UNLESS NOTED X ±.06 XX ±.03 XXX ±.015 ANGLES ±1° FLATS ±.005		 THIRD ANGLE PROJECTION	THIS DRAWING AND ALL INFORMATION THEREON IS THE SOLE PROPERTY OF TRINETICS. IT MUST NOT BE COPIED, REPRODUCED OR SUBMITTED TO OTHERS WITHOUT WRITTEN AUTHORIZATION. ALL REPRODUCTIONS ARE SUBJECT TO RETURN ON DEMAND. ALL DIMENSIONS ARE IN INCHES UNLESS OTHERWISE SPECIFIED		 POWER SYSTEMS, INC.
NEXT ASSEMBLY		HUBBELL LIBERTY SERIES 27 kV 16 kA 3GR			
SIMILAR TO		DATE 7/2/20			
DRAWN BY HBALLARD		SCALE 1:4		CURRENT ERN	REV
WEIGHT		SHEET 1 OF 1		-	-
SIZE FAMILY ID D				PART NUMBER H3PGR2LSS001	